

End caps
FLX-CS-PVC/FLX-CF-PVC



Description

The FLX-CS-PVC end cap is used for plugging the ends of FLX-HDPE and FLX-HDPE-A ducts, e.g. when installing ducting on the construction site - they effectively protect against contamination of the interior of the ducts. At the same time, FLX-CS-PVC end cap is also used to plug unused connection spigots in plenum boxes and FLX-PLO distribution boxes (but they are not inserted inside the spigot, but onto it).

FLX-CF-PVC end caps are used for plugging unused connection spigots in plenum boxes and FLX-PRO distribution boxes. The end caps are made of PVC.


Product code example

Product code: **FLX-CS-PVC - 75**

type

diameter

Dimensions

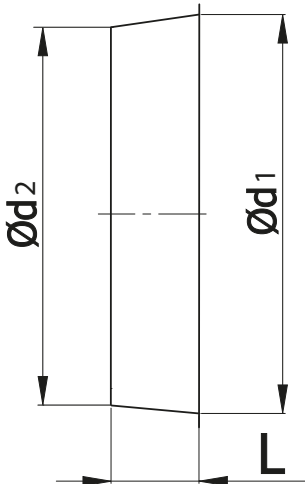

Product code	Ø ₁ [mm]	Ø ₂ [mm]	L [mm]
FLX-CS-PVC-63	51	49	20
FLX-CF-PVC-63	66	63	20
FLX-CS-PVC-75	63	59	20
FLX-CF-PVC-75	78	78	20
FLX-CS-PVC-90	76	74	20
FLX-CF-PVC-90	95	91	20

How to install



FLX-CS-PVC end caps fit inside FLX-HDPE and FLX-HDPE-A ducting.



FLX-CS-PVC end caps are mounted onto the connection spigots of FLX-PLO-75 and FLX-PLO-90 plenum boxes.



FLX-CF-PVC end caps fit inside the connection spigots of FLX-PRO-63 plenum boxes.